

Technical Specifications
of
240 x 64 Pixels Graphic LCD Module

REVISION 'A'
DATE: 20, DEC., 1997.

1. General:

LAMPEX LCD Module Model No. LG240641SGBC, is a complete LCD Module including Printed Circuit Board, with driver circuitry of LCD Drivers built in along with discrete components for driving the Liquid Crystal Display forming an Graphic LCD Module to display the Graphic Information in 240 Pixels in horizontally and 64 Pixels in vertically.

This Module is builtup of High Contrast Super Twisted Neumatic (STN) LCD panel with wide viewing angle. The Viewing Angle & Contrast can be adjusted as shown in the figure mentioned in the specifications.

2. General Specifications:

- **Order Code No: LG240641SGBC\SYBC**
- Graphic LCD Module
- 240 Dots Pixels x 64 Dot Pizels
- STN, Reflective, Positive Type
- Anti-glare & UV Protected Poloriser, Hard Coated.
- View Angle 6'Clock (Bottom View)
- Metal Frame (Plated Zinc - White / Black)

3. Mechanical Specifications:

- Module Size 180.0 mm x 72.0 mm
- Viewing Area 132.6 mm x 39.0 mm
- Pixels Area 127.15 mm x 33.87 mm
- Dot Size 0.48 mm x 0.48 mm
- Dot Space 0.05 mm

4. Electrical Requirements:

4.1 Absolute Max. Ratings

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Operating Temperature	Top	-10	-	+60	° C	Vss=0 V
Storage Temperature	Tst	-20	-	+70	° C	
Humidity	RH	-	-	90 %	%RH	
Power Supply Voltage	Vdd	0	-	6.0	V	
Input Voltage	Vi	Vss	-	Vdd	V	

Technical Specifications
of
240 x 64 Pixels Graphic LCD Module

REVISION 'A'
DATE: 20, DEC., 1997.


4.2 Electrical Characteristics :

ITEM	SYMBOL	TEST CONDITION	STD. VALUES			UNITS		
			MIN.	TYP.	MAX.			
Input High Voltage	V_{IH}	-	0.8	-	V_{dd}	V		
Input Low Voltage	V_{IL}	-	V_{ss}	-	-	0.2		
Supply Voltage	$V_{dd}-V_{ee}$	-	-	-	20.0	V		
Current Consumption	Logic	I_{dd}	$V_{dd}=5.0V, F_{lm}=74Hz$		-	2.6	4.5	mA
	LCD Drive	I_{ee}	$V_{dd}-V_o=12.0V$		-	1.6	2.8	mA
Operating Voltage for LCD	$V_{dd}-V_o$	$T_a = 0^\circ C$	-	-	8	-	-	
		$T_a = 25^\circ C$	-	12.0	-	-	V	

5. Electro Optical Characteristics :

ITEM	SYMBOL	MIN	TYP	MAX	UNITS	REMARK	NOTE	
Operating Voltage	V_{op}	8.0	10.0	12.0	V		1	
Response Time	Rise time	t_r	-	100	150	mSec	$V_{op}=12V$	2
	Decay time	t_d	-	150	200	mSec		
Contrast Ratio	Cr	1.4	4.0	5.0	K	$T_{op}=25^\circ C$	3	
Frame Frequency of LCD	f_r	64	72	80	Hz	$T_{op}=25^\circ C$	1	
Viewing Angle 6' Clock (Bottom View)	Θ	20	-	80	deg	$F= 0^\circ$	4	
		20	-	80	deg	$F= 90^\circ$		
		20	-	80	deg	$F= 270^\circ$		


Note 1: Definition of Operating Voltage and Frequency (Duty = 1/64 Mux)

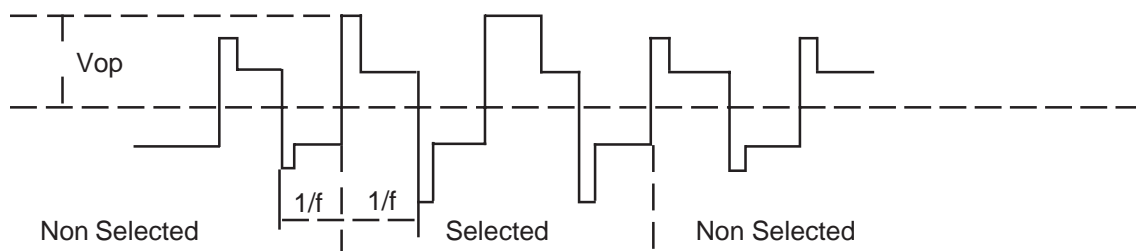

Technical Specifications of 240 x 64 Pixels Graphic LCD Module


REVISION 'A'
DATE: 20, DEC., 1997.

Note 2: Definition of Response Time

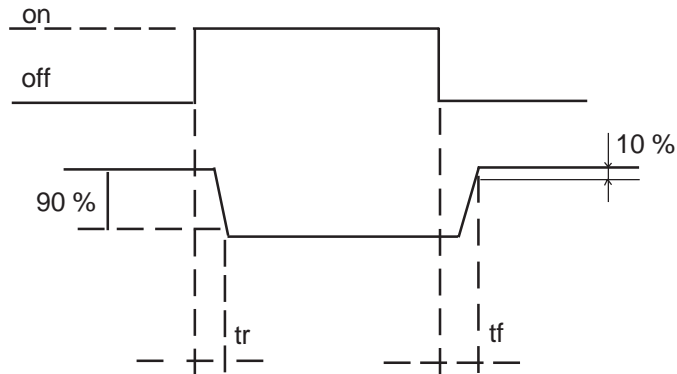


Note 3: Definition of Contrast Ratio

$$K = \frac{\text{Brightness of non-selected segment (B2)}}{\text{Brightness of selected segment (B1)}}$$

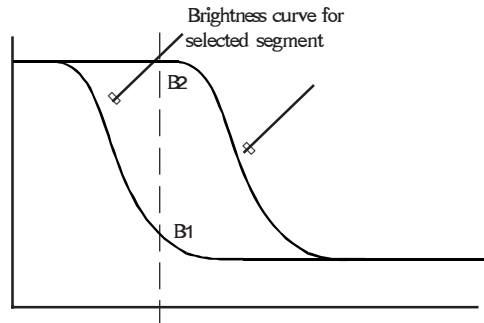


Note 3: Definition of Viewing Angle

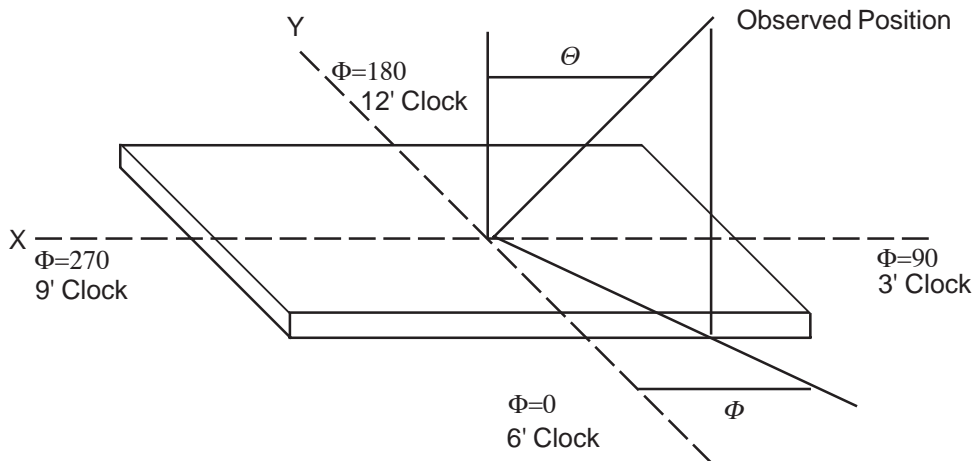

Technical Specifications
of
240 x 64 Pixels Graphic LCD Module

REVISION 'A'
DATE: 20, DEC., 1997.

6. Environmental Tests :

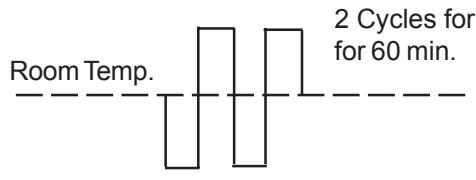ITEM	CONDITION
Storage in High Temperature	+60 ± 2 °C for 240 Hours
Storage in Low Temperature	-20 ± 2 °C for 240 Hours
Damp Heat Storage	+45 ± 5 °C for 240 Hours/RH=90 to 95%
Thermal Cycles	 <p style="text-align: right;">2 Cycles for +60 ± 2 °C for 60 min.</p> <p style="text-align: center;">1 Cycle, -20 ± 2 °C for 30 min.</p>
Vibration	Total Amplitude : 2.0 mm Frequency : 10 to 55 Hz/min Tested for above Conditions for X, Y, Z direction for each for 15 min.
Life Expectancy	50,000 Hours Typ.(LCD Panel)

Every Test items shall meet the following Criteria.

(Criteria of Judgement)

1. All of the segments shall not be blurred.
2. All segments shall be usually displayed.

Judgement should be made after exposure in room temperature conditions for 2 Hours.


Technical Specifications
of
240 x 64 Pixels Graphic LCD Module

REVISION 'A'
DATE: 20, DEC., 1997.

7. Module Connector Pin Layout :

Pin No.	Signal	FUNCTION
1	D	Display Data
2	FLM	The Signal Indicates the beginning of each frame
3	M	Alternate Signal for LCD Driving Waveform
4	CL1	Data Latch Signal
5	CL2	Data Shift Clock Pulse
6	NC	No Connection
7	Vdd	Power Supply for Logic (+5 Volts)
8	Vss	Signal Ground
9	Vee	Power Supply for LCD (-12 Volts)
10	Vo	Operating Voltage for LCD Drive (Variable)


8. Schematic Block Diagram :

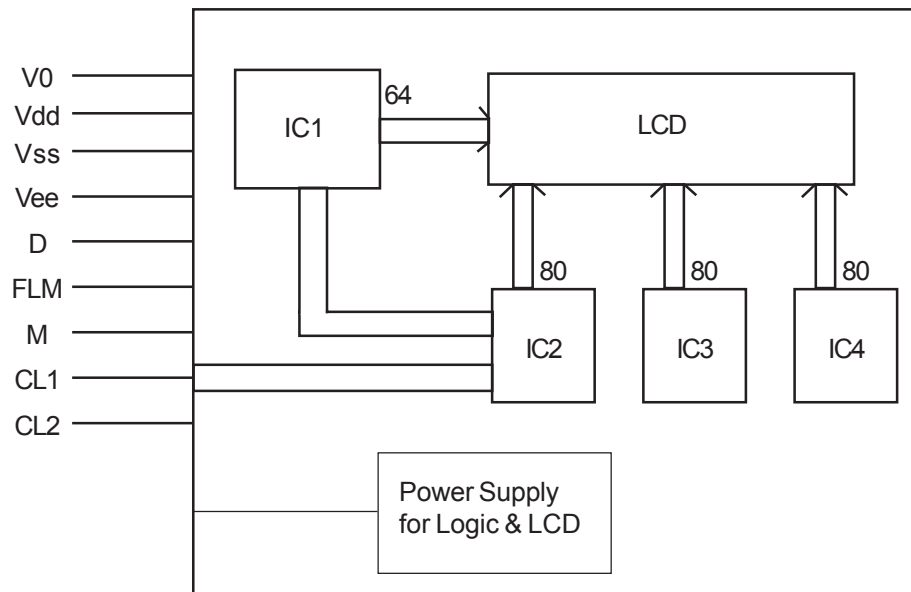

Technical Specifications of 240 x 64 Pixels Graphic LCD Module

REVISION 'A'
DATE: 20, DEC., 1997.

ALL DIMENSIONS IN MM
NOT TO SCALE

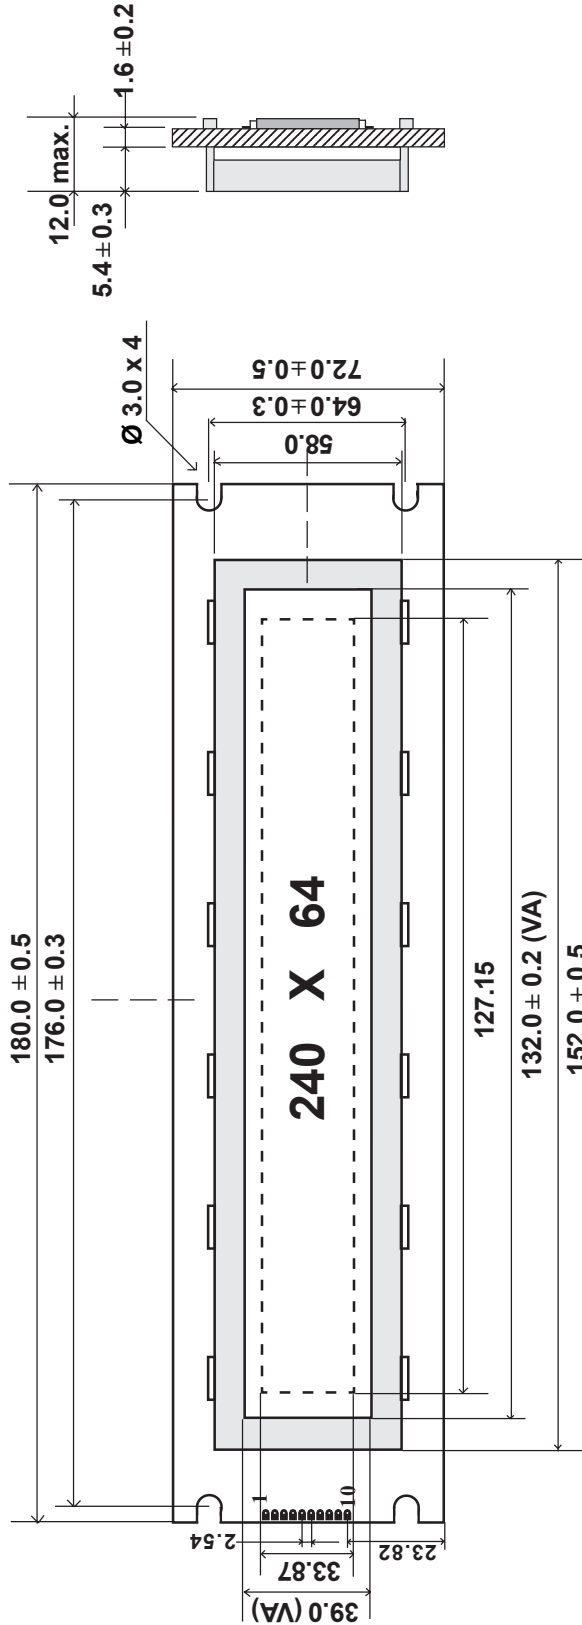

Model Code	: LG240641SGBC\SYBC
Description	: 240 Pixels x 64 Pixels
Font Matrix	: 5 x 7 plus Cursor = 40 Characters x 8 Lines
Display Type	: STN, Silver Gray
Polariser Type	: Reflective/Positive
Driving Duty	: Anti-glare & UV Protected, Hard Coated
Viewing Angle	: 1/64 Mux
Metal Frame	: 6' Clock (Bottom View)
Operating Temp.	: Plated Zinc - Black
Storage Temp.	: -10 to +60 °C
Controllers	: -20 to +70 °C
	: Graphic LCD Controllers

